




**BOP STACK**  
**3-1/16" 10M QUAD BOP**  
**Under 3500PSI**

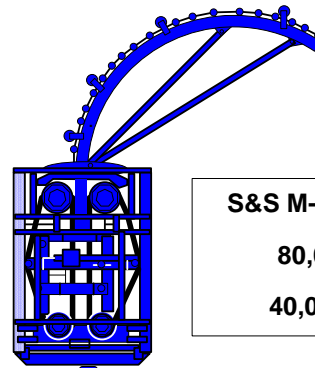

**S&S M-80L Injector**  
80,000 Pull  
40,000 Snub

10M Side Door Packer

10M Side Door Packer

**BOP Shear Rams Capable of Shearing any Coiled Tubing up to 1-1/2" Ran Across Them at or below MAOP**

Kill Line  
One 2" Full Bore 10M Manual Valve and One 2" 10M Hydraulic Valve

<b>3-1/16" 10 M Quad BOP</b>
Hydraulically-operated Blind rams
Hydraulically-operated shear rams
<b>Kill Line</b>
Hydraulically-operated slip rams
Hydraulically-operated pipe rams

Choke Line  
One 2" Full Bore 10M Manual Valve and One 2" 10M Hydraulic Valve

**3-1/16" 10M Pipe Ram**  
Hydraulically-operated

Optional 3-1/16" 10m Spacer Spool(s)

3-1/16" 10M Rental Gate Valve

Adapter X 3-1/16 10M (Optional)

Tree Crown Valve

